


industrial
commercial
residential

Brush strip




A complete range of brush strips plus garage door weatherseals

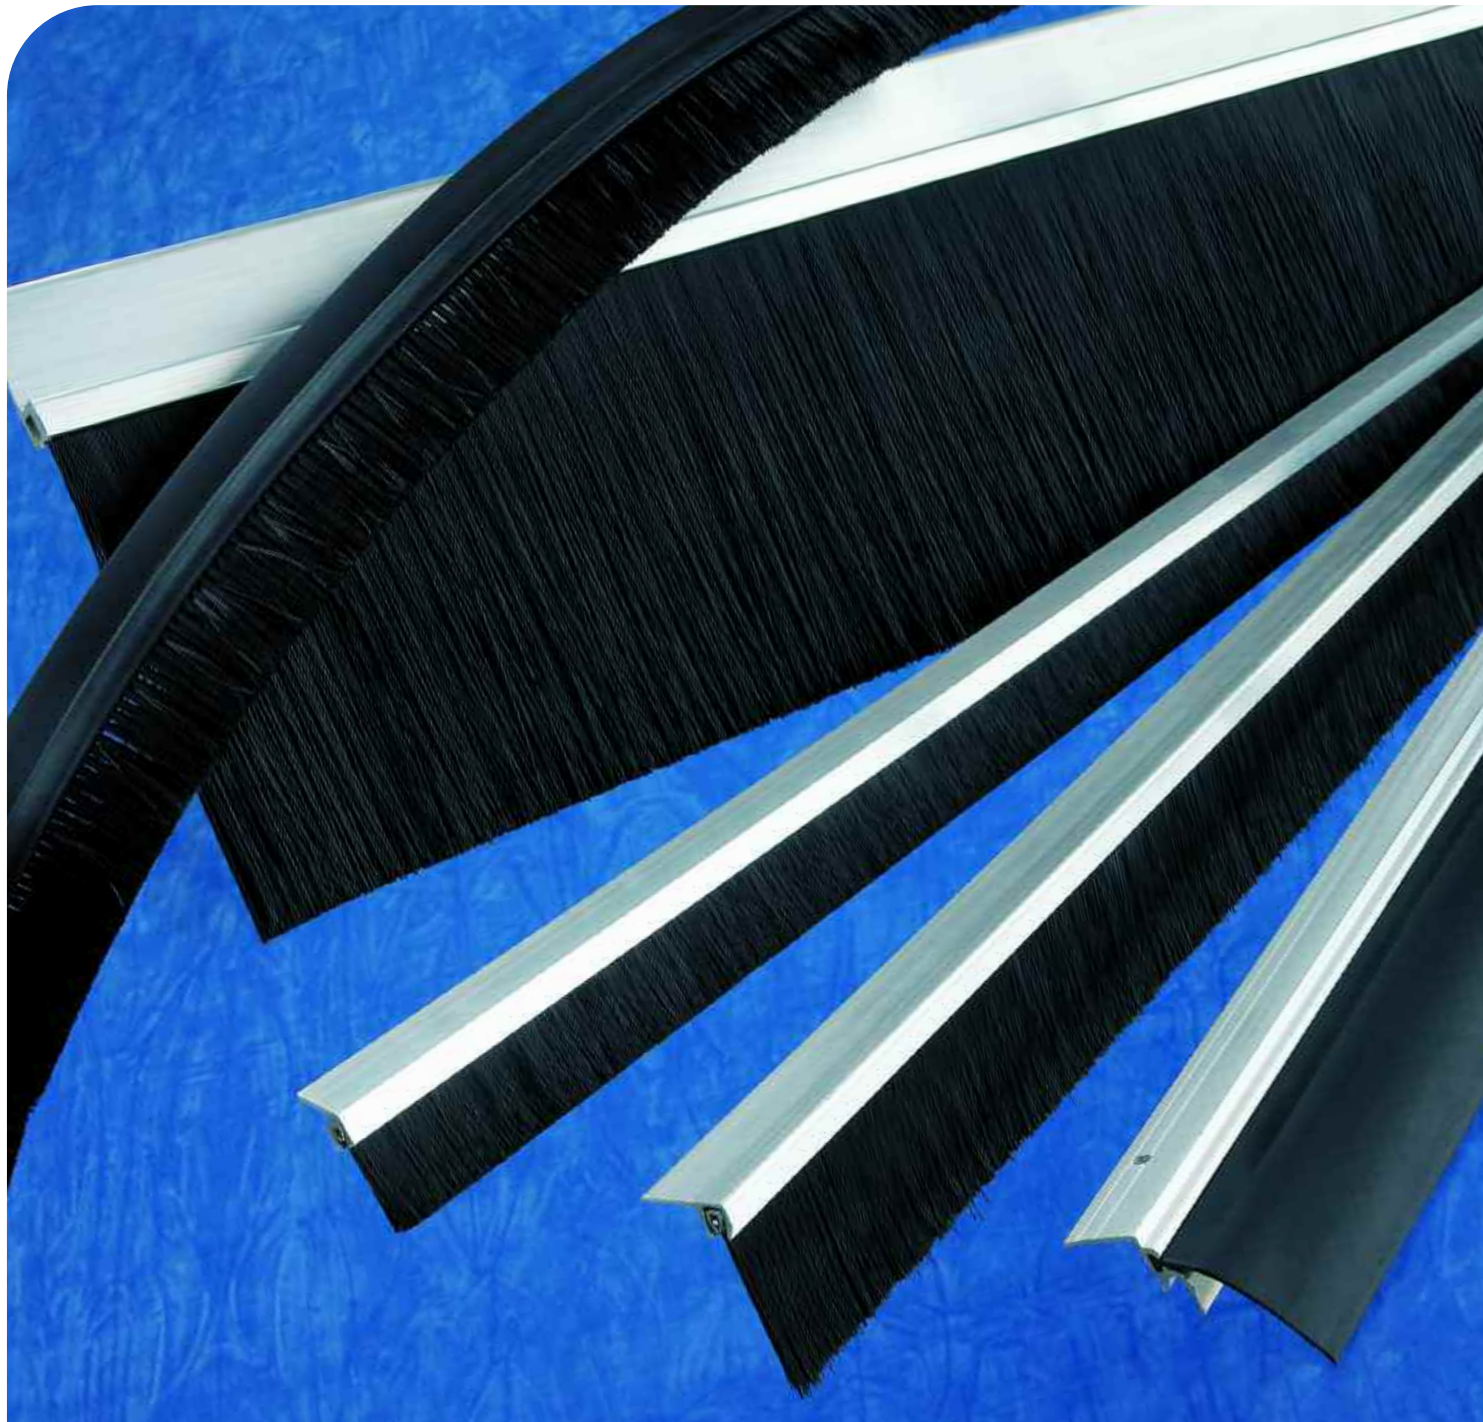


Brush strip

Brush strip can be used for an infinite variety of applications, including sealing against air, light, dust and sound. They can also be fitted as guides and retainers.

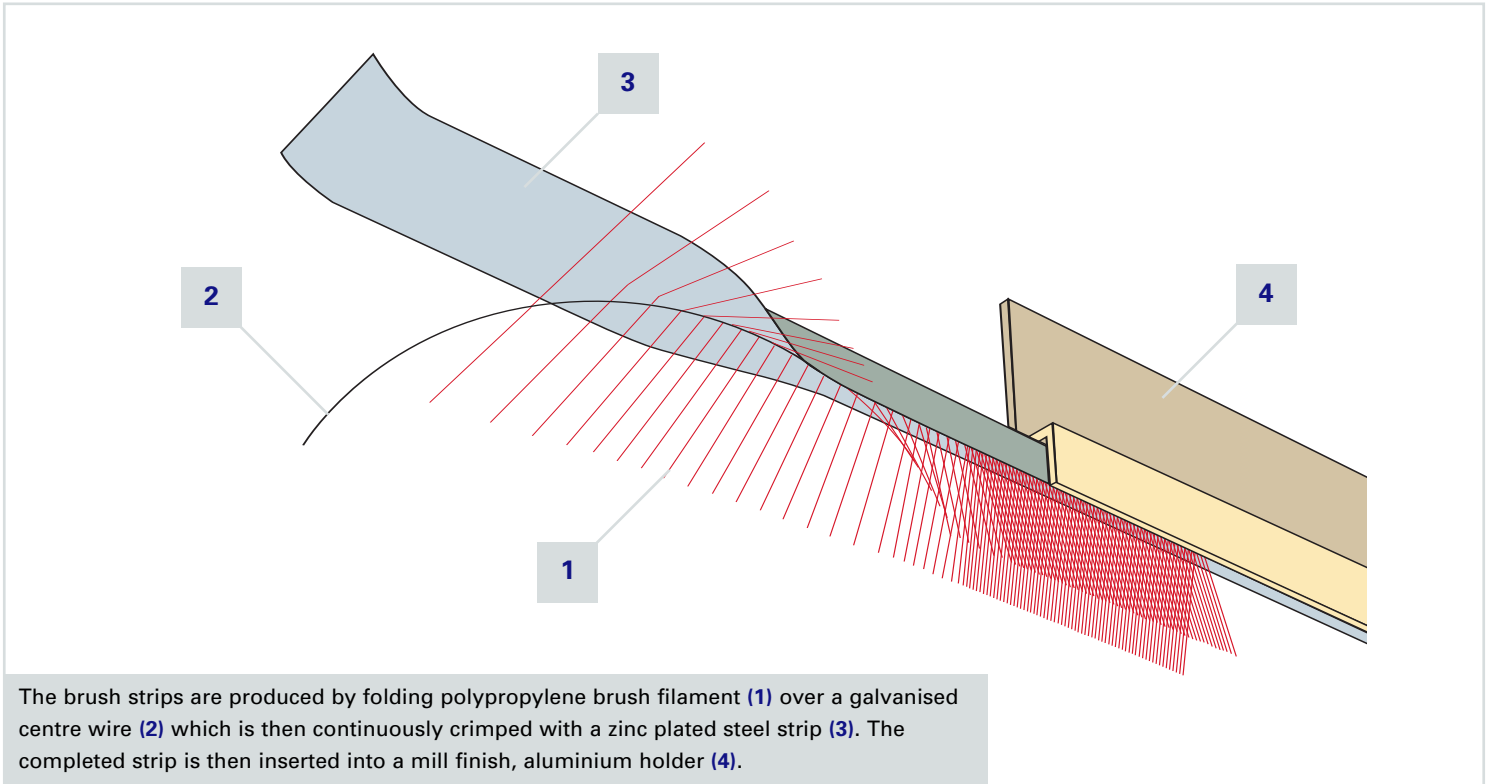

All strips are 3m long with various brush lengths and the aluminium holders are available in 3 profiles; **F**, **Y** and **H**.

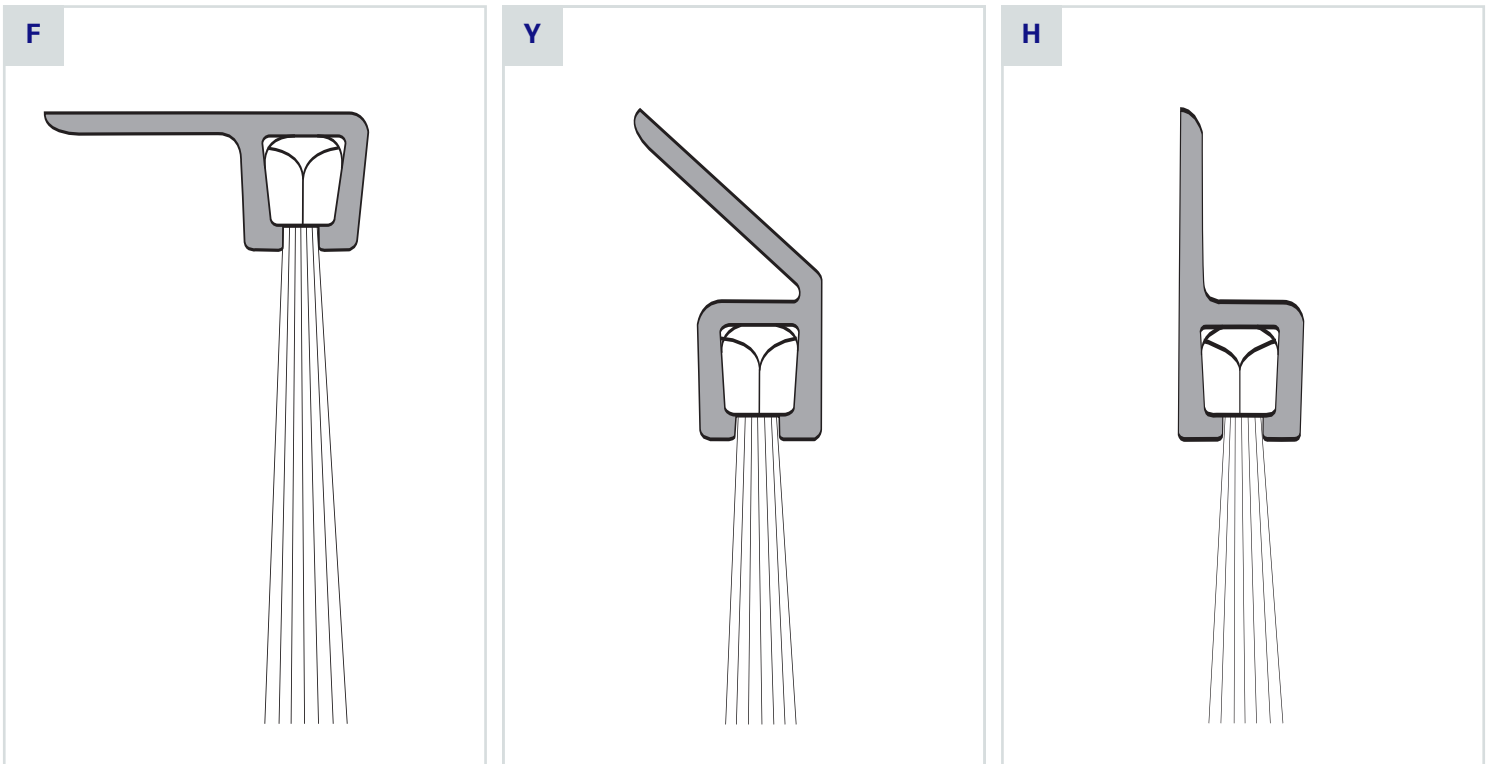


The brush strips described on pages 2 to 5 of the catalogue are manufactured by Tribollet S.A.S of France who hold ISO 9002 (1994) quality control certificate no. QUAL/1996/5358a



Brushprofile F

Scale 1:1 millimetres

F3




F3.14 X = 14

F3.24 X = 24

F3.34 X = 34

F5

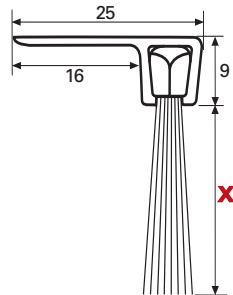


F5.25 X = 25

F5.35 X = 35

F5.45 X = 45

F8

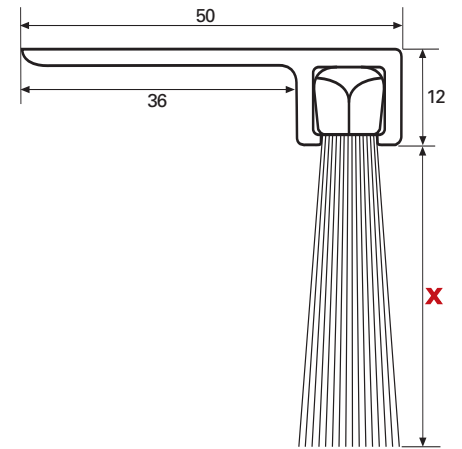

F8.40 X = 40

F8.100 X = 100

F8.60 X = 60

F8.120 X = 120


F8.80 X = 80

F8.150 X = 150

Brushprofile Y

Scale 1:1 millimetres

Y3

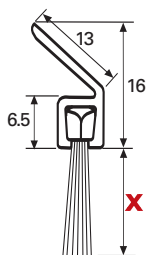


Y 3.14 X = 14

Y 3.24 X = 24

Y 3.34 X = 34

Y5

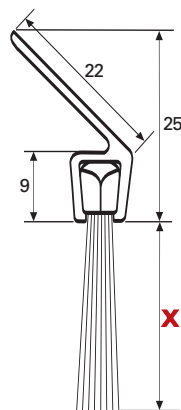


Y 5.25 X = 25

Y 5.35 X = 35

Y 5.45 X = 45

Y8

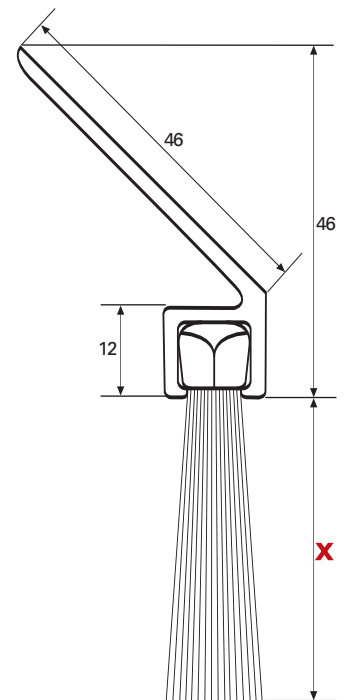

Y 8.40 X = 40

Y 8.100 X = 100

Y 8.60 X = 60

Y 8.120 X = 120


Y 8.80 X = 80

Y 8.150 X = 150

Picture 1 Brush profile H used on cable ducting



Picture 2 Brush profile F used as a guide on a packaging machine

Picture 3 Brush profile Y used on roller shutters

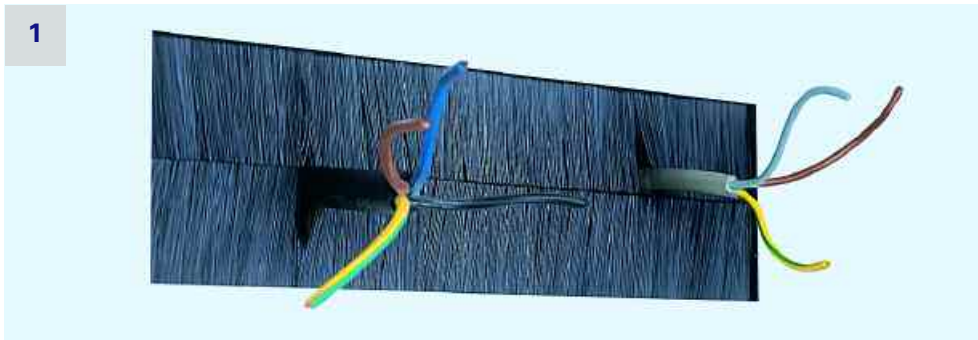

Brushprofile H

Scale 1:1 millimetres

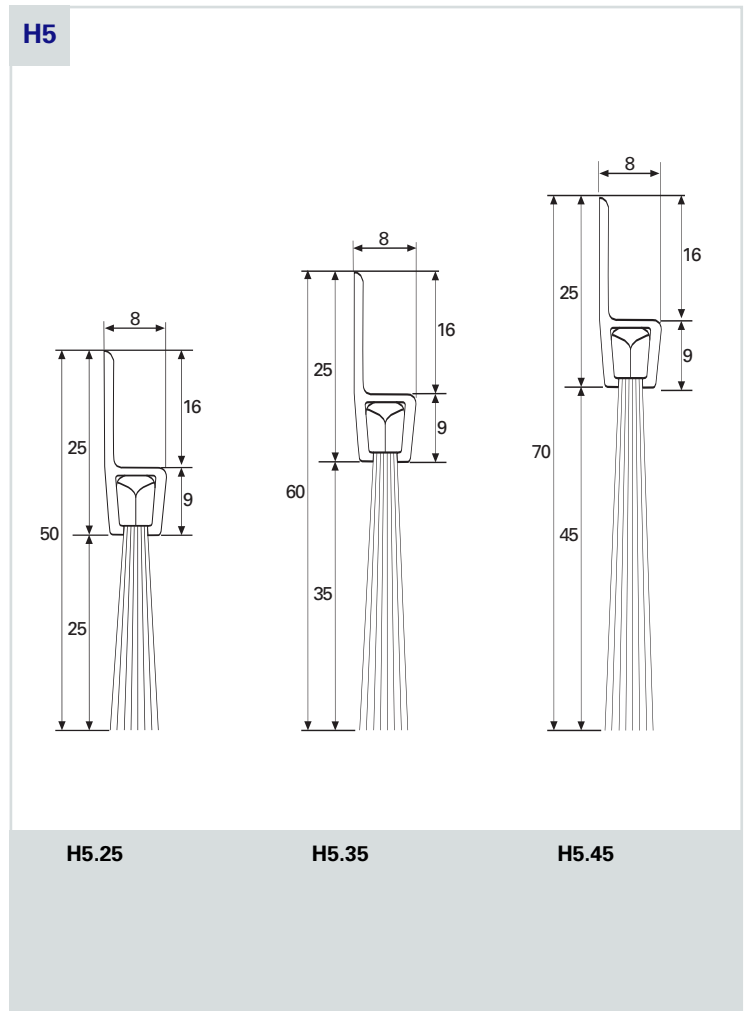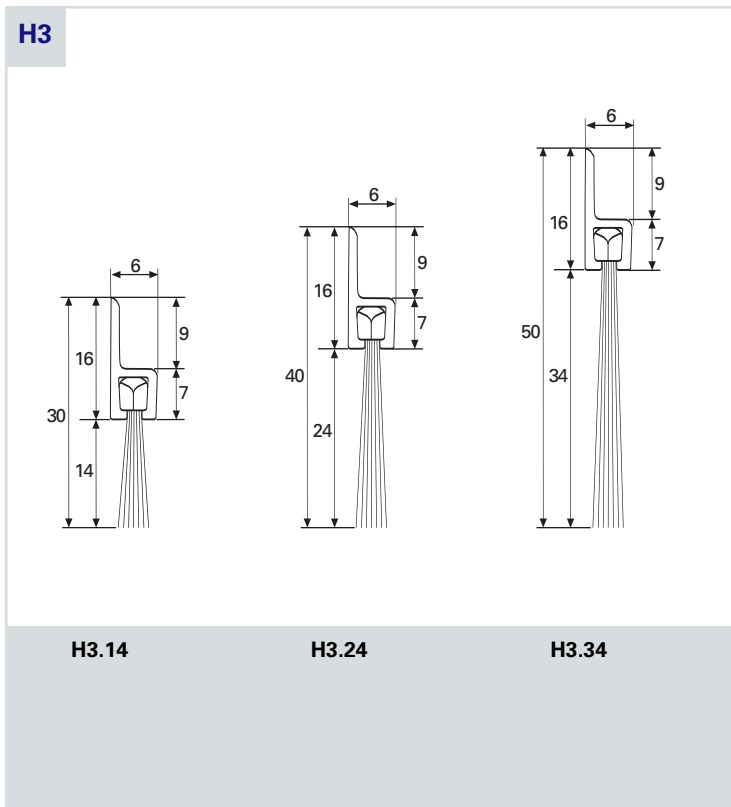


Brushprofile H (continued)


Scale 1:1 millimetres

Now Available H8.100


H8

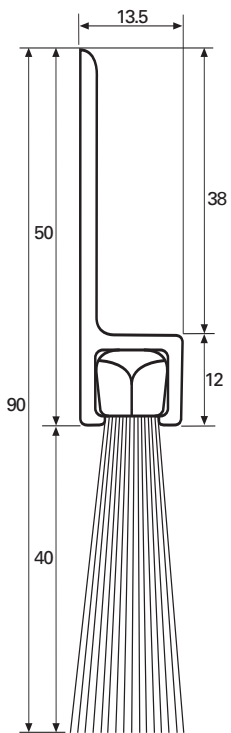


H8.40

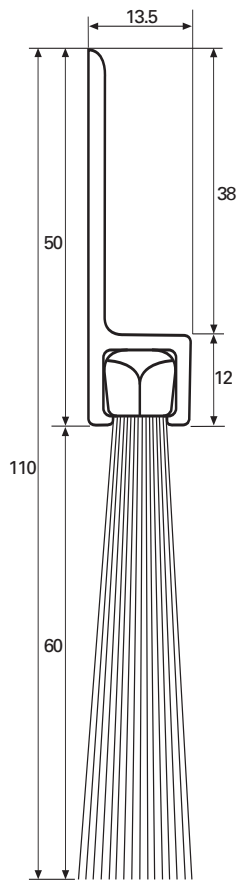


H8.60

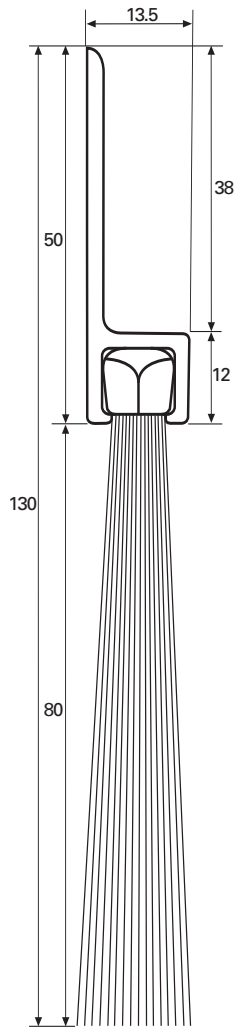

H8.80

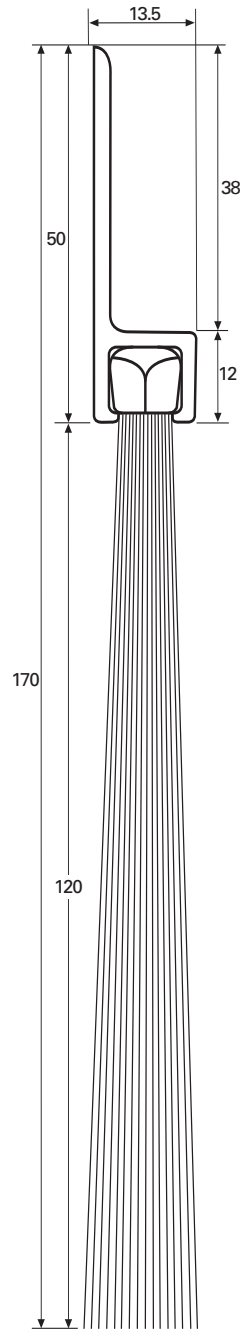



H8.120

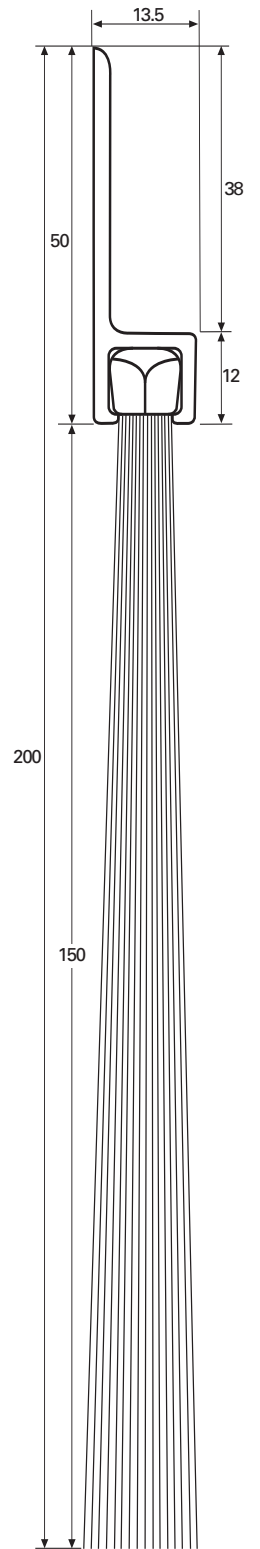

H8.150

Flexible brush strip

Flexibrush is produced by moulding the brush filament into a strong but flexible PVC brush holder. Available in two brush lengths 'Flexibrush' is supplied in boxed 25 metre rolls

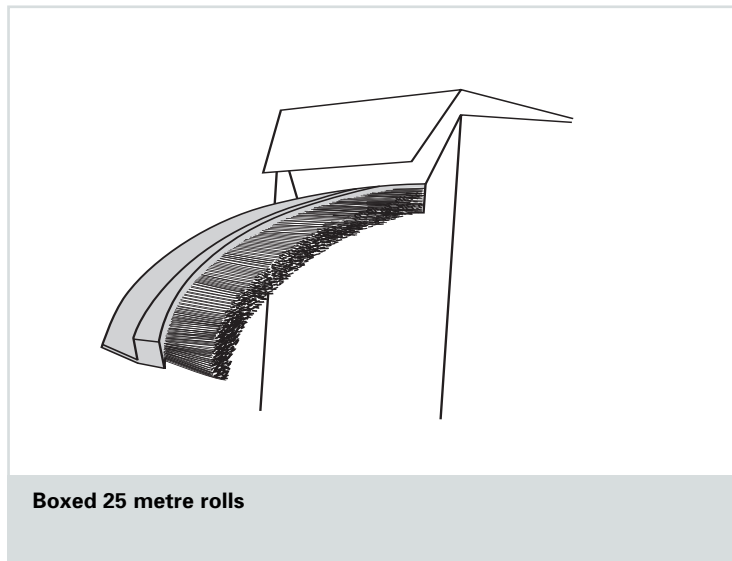
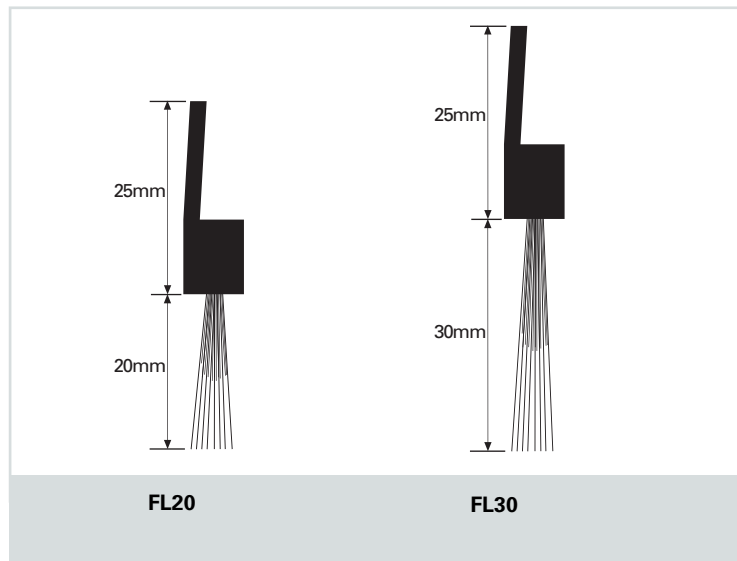


Roller shutter brush strip

RS12

Brush strip has been specifically designed for the side sealing of roller shutters. Supplied in 3m. lengths, it is easily cut and clipped onto the side guide channels (3mm. thick).



The brush provides an effective seal over the full height of the door and eliminates draughts, shaking and rattling. The brush carrier is extended, rigid PVC and the nylon brushes ensure long life.

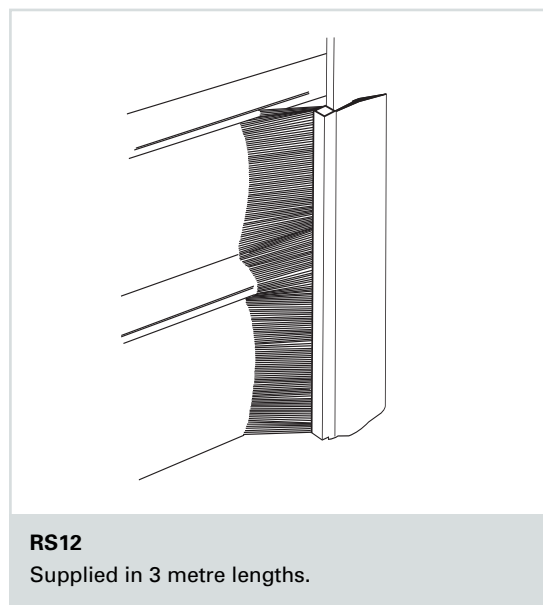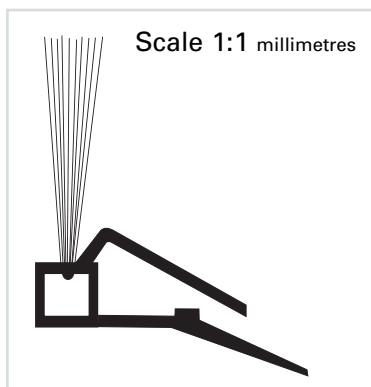

Industrial door threshold

RS13

The threshold bar solves many problems associated with poor floors in commercial and industrial buildings. For roller shutters, sectional doors and hinged doors where the bottom weatherseals are fitted, the extruded aluminium threshold provides a flat surface for the seal plus a weatherbar.

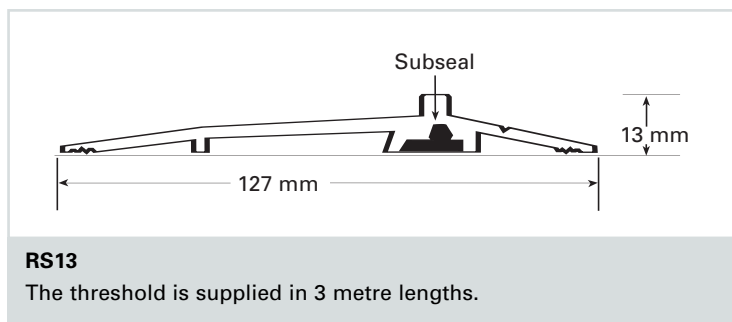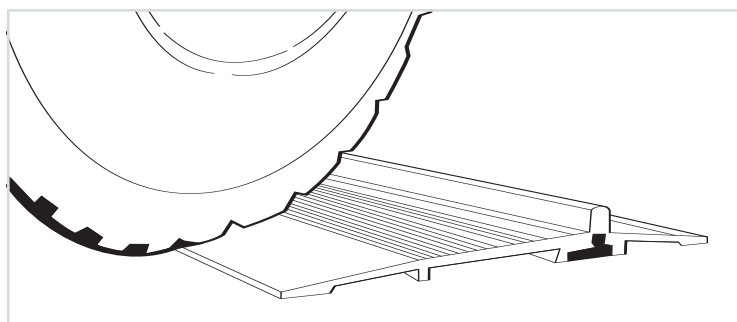

Garage door weatherseals

Two weatherseal systems for up and over garage doors which form an effective draught seal, stops dust, leaves and discourages insects and rodents.

Single door kit containing:

1 x 8ft seal retainer plus 1 x 8 ft EPDM seal and screws

Double door kit containing:

2 x 8ft seal retainers plus 1 x 16ft EPDM seal and screws



Features

- 1 Suitable for steel, timber and composite doors
- 2 Weather energised seal with a dual hardness blade which compensates for under door gaps up to 40mm. Aluminium (mill finish) seal retainer
- 3 Easy fit. Simply cut to length and screw to the door with the self piercing screws provided. No need to remove the door
- 4 Does not restrict the door movement

Garin - Internally fitted

Single door kit no. IN1M



Double door kit no. IN2M

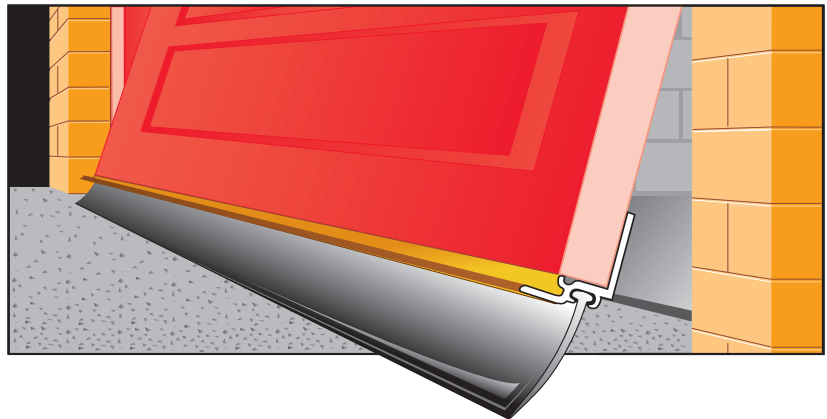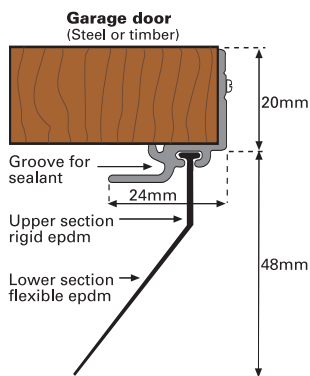









Garex - Externally fitted

Single door kit no. EX1M

Double door kit no. EX2M

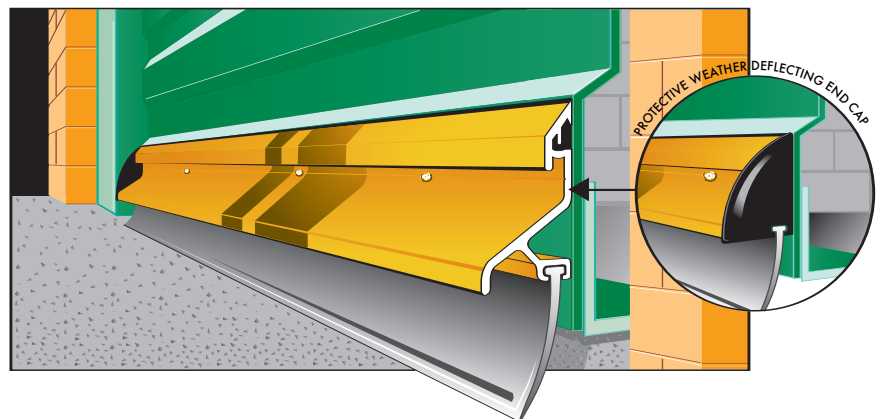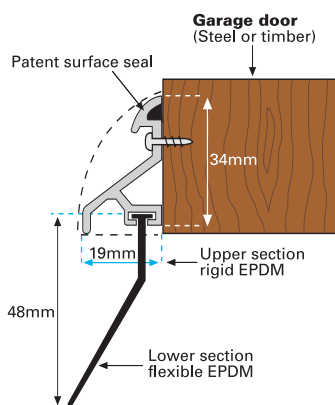

industrial
commercial
residential



Universal Hardware Direct UK Ltd
Unit 202 Kingspark Business Centre,
152 – 178 Kingston Road,
New Malden,
Surrey,
KT3 3ST
Tel: 020 8605 1087
Fax: 020 8605 1088
web: www.hardwaredirectuk.co.uk
Company Reg: 4582225